

**Manufactured in the UK, to meet the demands of restaurants, bars and clubs around the world.**

Precision's range of heavy-duty back bar fridges are for bars that are serious about cold drinks. Their performance is uncompromising, their looks are strikingly modern with stainless steel construction inside and out, and their bright interior and designer shelving are perfect for merchandising.

Each model is available with either integral or remote refrigeration, delivering fast pull down to storage temperature as well as holding the right temperature during busy service periods.

A 43°C high ambient refrigeration system - managed by Precision's iCool energy saving controller - provides accurate temperature control and peace of mind 24 hours a day. Audio visual temperature alarms come as standard.

The self contained side-mounted refrigeration system is vented from the front allowing the cabinet to be built into the bar without affecting performance. Defrost is automatic and our energy saving waste heat vaporiser system eliminates the need for a drain.



self contained

### Thoughtful Design Features

Cabinets are available in a variety of finishes including polished, and brushed stainless steel, black, white and just about any painted colour finish you or your designer can imagine. Bright fluorescent interior lighting comes as standard.



remote

### Adjustable Shelving

Lockable, self-closing doors, with removable magnetic balloon type gaskets provide access to the adjustable shelving system. Two heavy-duty stainless steel shelves are supplied per door as standard but extras can be ordered as required.



optional remote condensing unit

### Flexibility

**precision** Heavy Duty Back Bars are available with 2, 3 and 4 doors giving a capacity of 220 to 420 330ml bottles. Door options include glass and solid as well as custom door hangs to suit your individual bar.

### General Specifications


High ambient (43°C) refrigeration system  
iCool energy saving controller with alarms  
Automatic off cycle defrost  
Zero ODP injected polyurethane insulation  
Interior light  
Adjustable shelving system  
Coved interior and base  
Self closing doors  
Removable magnetic door gasket  
Remote includes; valves & condense pump

### Options

Exterior finishes  
Extra shelves and clips  
Solid / Glass door (H)  
Remote condensing unit - R  
Handle specification  
Locking facility  
Service void - remotes (increases length)

### Temperatures

Refrigerators (H) 3 / 8 C

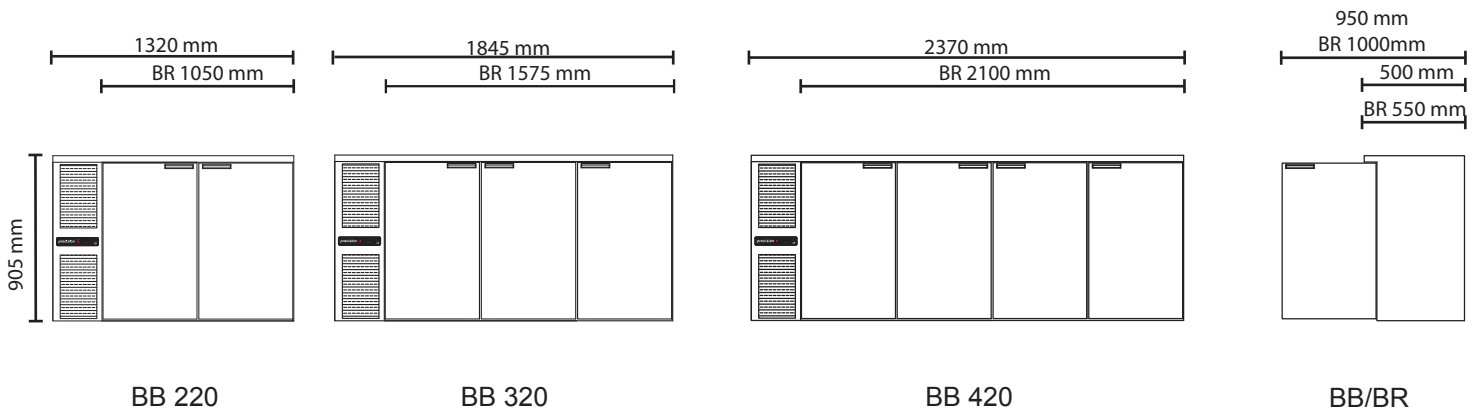

### Technical Data

model	temp. °C	nom. cap. wine	l mm	d mm	h mm	gas	shelves	ref. cap. watts	evap. @ °C	power	amps	wt. kg
<b>BACK BAR HD - INTEGRAL</b>												
BBS 220	3 / 8 C	100	1320	500	905	R134A	4	529	-5 C	240 / 50 / 1	3.5	125
BBS 320	3 / 8 C	150	1845	500	905	R134A	6	529	-5 C	240 / 50 / 1	3.5	155
BBS 420	3 / 8 C	200	2370	500	905	R134A	8	529	-5 C	240 / 50 / 1	3.5	185
<b>BACK BAR HD - REMOTE</b>												
BBR 220	3 / 8 C	100	1050	550	905	R134A	4	529	-5 C	240 / 50 / 1	1.5	105
BBR 320	3 / 8 C	150	1575	550	905	R134A	6	529	-5 C	240 / 50 / 1	1.5	135
BBR 420	3 / 8 C	200	2100	550	905	R134A	8	529	-5 C	240 / 50 / 1	1.5	165