

Manufactured in the UK, to meet the demands of commercial kitchens around the world.

Precision's range of space saver counter and under counter units are perfect for space optimisation in even the smallest of kitchens.

These durable all stainless steel Gastronorm cabinets are available in three different temperature ranges: Refrigerator +1/+4°C, Deep Freeze -18/-22°C or Variable temperature which can be switched from Refrigerator to Deep Freeze at the touch of a button.

A simple ergonomically designed stainless steel handle provides access to a Gastronorm shelving system, while a 43°C high ambient refrigeration system - managed by Precision's i'Cool energy saving controller - provides accurate temperature control and peace of mind 24 hours a day. Audio visual temperature alarms come as standard, along with HACCP capability.

The self contained front vented refrigeration system is easily accessible for servicing. Defrost is automatic and our energy saving waste heat vaporiser system eliminates the need for a drain.



Thoughtful Design Features

Door hang of the self closing doors can easily be changed from right to left on site if required. Counters can be easily moved for cleaning or site positioning thanks to the standard rollers fitted to the rear and front mounted adjustable levelling feet.



Gastronorm Shelving

A lockable door, with removable magnetic ballon type gasket provides access to an adjustable Gastronorm shelving system. GN 1/1 pans, shelves or trays are supported on removable anti-tilt stainless steel slides and ladder racking.

Optional Features

Open wells - with or without insulated lids - are available to turn your space saver into a prep station. Drawers, hydrocarbon refrigerants and extra shelves are also available.

General Specifications


High ambient (43°C) refrigeration system
 Stainless steel interior and exterior
 iCool Energy saving controller with alarms
 Electronic defrost
 Zero ODP injected polyurethane insulation
 1/1 gastronorm shelving system
 Removable racking with anti-tilt slides
 Self closing doors
 Removable magnetic door gaskets
 Adjustable levelling feel - Front
 Rollers - Rear
 Reversible door hang

Options

Extra shelves and slides
 Bank of (2) drawers with locks
 Castors
 Helicoil cable
 Open pan well

Temperatures

Refrigerators (H) 1 / 4°C
 Deep freeze storage -18 / -22°C
 Variable (V) 1 / 4 or -18 / -22°C

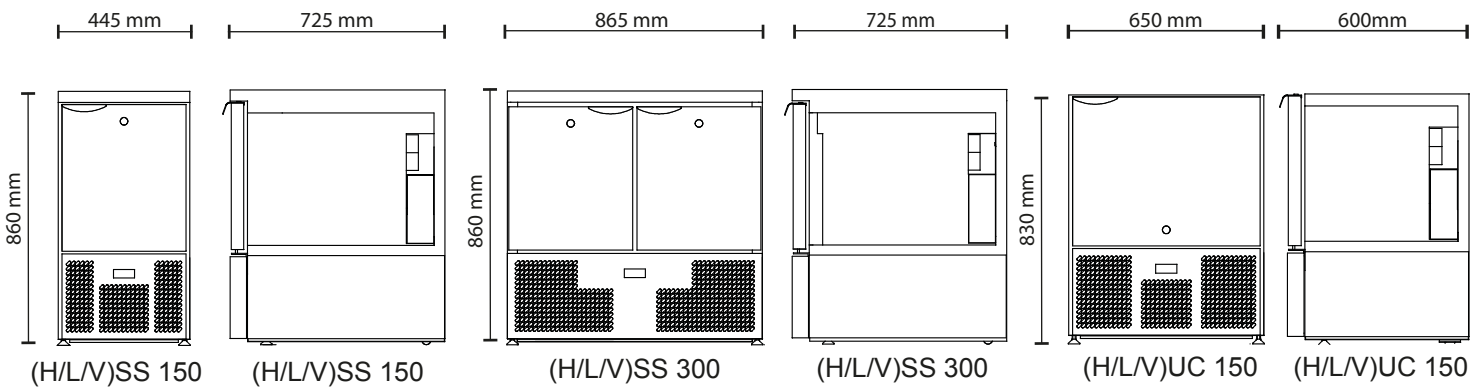

Technical Data

model	temp °C	nom cap litre	l mm	d mm	h mm	gas	shelves	ref cap	watts	evap @ °C	power	wt. kg
One Door												
HSS 150 SS	1 / 4 C	150	445	725	860	R134A	2	504		-5 C	240 / 50 / 1	65
LSS 150 SS	-18 / -22 C	150	445	725	860	R404A	2	460		-30 C	240 / 50 / 1	75
VSS 150 SS	1/4 or -18/-22 C	150	445	725	860	R404A	2	650 / 480		-5 or -30 C	240 / 50 / 1	80
Two Door												
HSS 300 SS	1 / 4 C	300	865	725	860	R134A	4	504		-5 C	240 / 50 / 1	75
LSS 300 SS	-18 / -22 C	300	865	725	860	R404A	4	460		-30 C	240 / 50 / 1	85
VSS 300 SS	1/4 or -18/-22 C	300	865	725	860	R404A	4	650 / 480		-5 or -30 C	240 / 50 / 1	90
One Door												
HUC 150 SS	1 / 4 C	150	650	600	830	R134A	2	504		-5 C	240 / 50 / 1	95
LUC 150 SS	-18 / -22 C	150	650	600	830	R404A	2	460		-30 C	240 / 50 / 1	105