



*VUBC121 Model Above Is Shown With  
Optional Worktop*

Precision variable temperature drawers are designed to provide flexible refrigerated or freezer storage at the flick of a switch. The single GN2/1 drawer format is perfect when space is at a premium and provides bulk storage in the heart of the kitchen...exactly where it's needed.

Proudly made in the UK, these robust refrigerated drawers are capable of meeting the highest demands of commercial kitchens all around the world.

### Key Features:

Stainless Steel Interior & Exterior

-22 / +4°C Variable Temperature Range

Can Be Operated As Refrigerator Or Freezer

Heavy-Duty GN 2/1 Drawer - 150mm Deep

Designed To Operate In 43°C Ambient

R290 Refrigerant

Drawer Base Insert (Removable) To Ensure Optimum Air Circulation

Zero ODP Injected Polyurethane Insulation

Electronic Controller With Easy Read LCD Screen

Hot Gas Defrost

Rifle Bore Coated Evaporators

Front Breathing, Rear & Side Venting Refrigeration System

Integrated Flush Door Handle

Hi / Lo Audio Visual Temperature Alarms

Condensing Unit Safety System To Protect Compressor From Blocked Condensers

Waste Heat Recovery Condensate Vaporiser System



*VUBC121 Can Be Stacked And With  
Optional Worktop And Castors*

### Options:


Castors - Increases Height By 72mm

Heat Resistant Worktop - Increases Height By 29mm & Depth To 700mm

Stacking Kit

Total Height Of Two Stacked Units = 760mm  
(Excluding Optional Castors And/Or Worktop)

Total Height Of Two Stacked Units = 861mm  
(Including Optional Castors And/Or Worktop)

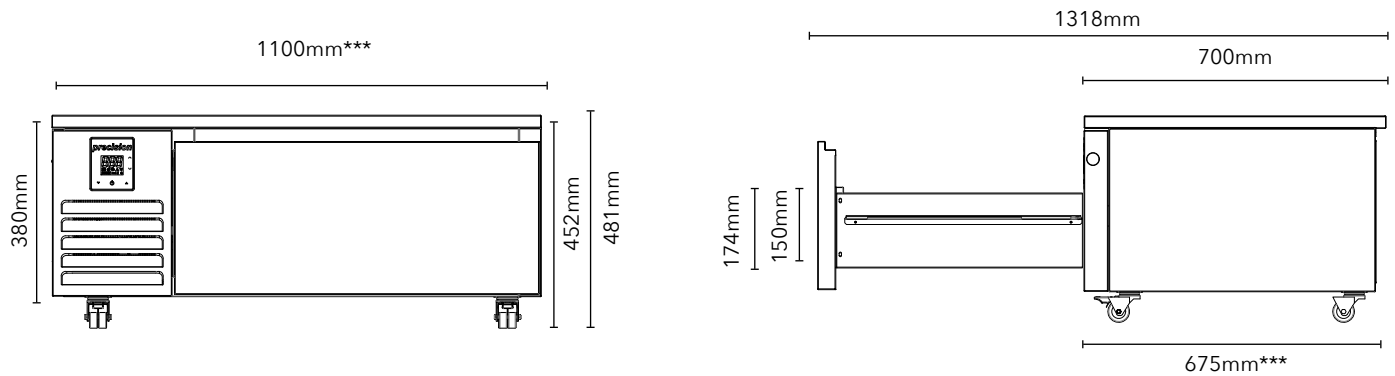

Model	<b>VUBC121</b>	
Type	Multi-Use	If Tested as Refrigerator
Material	ST/ST Int/Ext	
Drawer Size	GN2/1	
Maximum Pan Depth	150mm	
Max Number of Shelves	N/A	
Temperature Range	-22 / 4°C	-2 / 4°C
Exterior WxDxH (mm)	1100* x 675* x 380	
Net Usable Volume (litres)	52.7	52.7
Weight (KG)	70	
Refrigerant / GWP	R290 / 3	
Refrigeration Watts (+45°C Condensing)	208	491
Evaporating Temp	-30°C	-10°C
Heat Rejection Watts*	429	778
Noise Output (dBa)	75	75
Power	230 / 50 / 1	
Running Amps	1.4	
Energy Consumption / 24hrs - kWh**	2.57	0.90
Energy Consumption / Year (AEC) - kWh**	938	328
Energy Efficiency Class**	B	A

\* Heat Rejection is taken at the listed evaporating and condensing condition. Watts is calculated by taking the total power of the cabinet.

\*\* Tested to EN16825

\*\*\* 25mm Ventilation Gap Required On Left & Rear Of Unit For Built-in Applications

We are constantly innovating and improving our products. Please always check our website for the most up-to-date version of this spec sheet